

The Controller
is the Experience!

BAC 500 Controller

Maximizes space while saving time & money.

Smooth Performance. Silent.
Configurable. Reliable.

CUSTOMIZATION


Includes BACDoor software to calibrate and tweak performance

Delivers fine-tuned performance

QUALIFICATIONS


Meets **EN 15194** standards for controllers

IP67 when used with a sealed connector

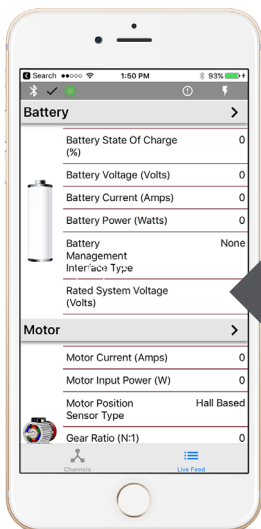

Includes BACDoor software to fine tune performance.

Power	500 Watts	
Weight	180 Grams	
Dimensions	81mm x 50mm x 26mm	
INPUT	RATINGS	UNITS
Suggested Battery Voltage	24 to 48	Volts DC
Power	Software configurable	Watts
OUTPUT *PHASE CURRENT	RATINGS	UNITS
Absolute Peak	70	Amps DC
1 minute rating	50	Amps RMS
Continuous	20	Amps DC
*No airflow, no additional heat sinking, 25°C ambient		
AVAILABLE PROTOCOL COMBINATIONS		
TTL-232	with	RS-485
TTL-232	with	Bluetooth
LIN	with	Bluetooth

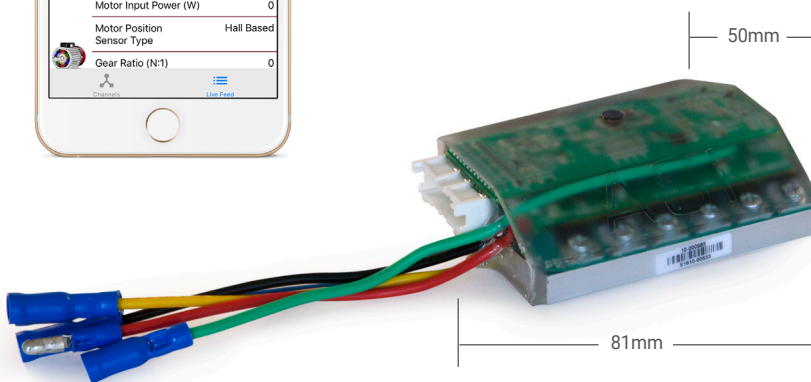

Engineered in Canada

ASI ACCELERATED SYSTEMS INC.

519.342.2507 | www.accelerated-systems.com

06.2017 © Accelerated Systems Inc.