



The Controller
is the Experience!

BAC 800 Controller


Maximizes space while saving time & money.
Smooth Performance. Silent.
Configurable. Reliable.

CUSTOMIZATION


Includes BACDoor software to calibrate and tweak performance
Delivers fine-tuned performance

QUALIFICATIONS

Meets **EN 15194** standards for controllers
IP67 when used with a sealed connector

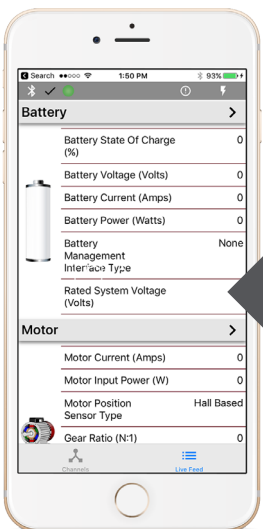

Includes BACDoor software to fine tune performance.

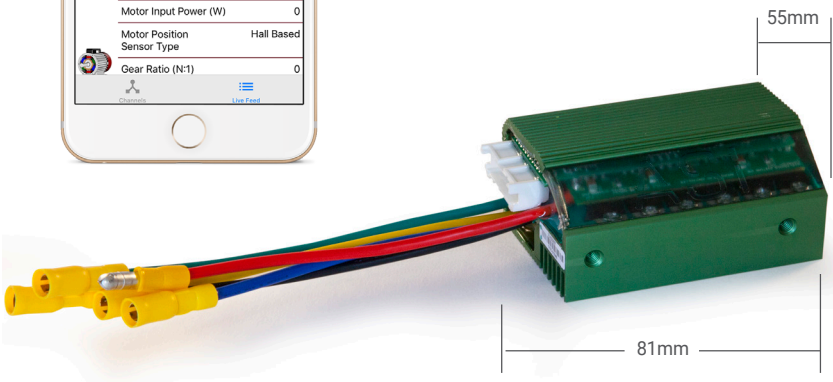

Power	800 Watts	
Weight	300 Grams	
Dimensions	81mm x 55mm x 39mm	
INPUT	RATINGS	UNITS
Suggested Battery Voltage	36 to 72	Volts DC
Power	Software configurable	Watts
OUTPUT *PHASE CURRENT	RATINGS	UNITS
Absolute Peak	90	Amps DC
1 minute rating	70	Amps RMS
Continuous	30	Amps DC
*No airflow, no additional heat sinking, 25°C ambient		
AVAILABLE PROTOCOL COMBINATIONS		
TTL-232	with	RS-485
TTL-232	with	Bluetooth
LIN	with	Bluetooth



519.342.2507 | www.accelerated-systems.com

 **Engineered in Canada**

06.2017 © Accelerated Systems Inc.