




## Overview

### Performance

- Smooth
- Silent
- Configurable
- Reliable

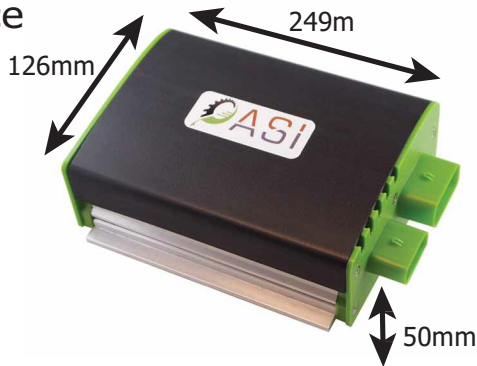

### Ease of Integration

- Maximizes use of space
- Saves time & money

### Customization

- Includes exclusive BACDoor software to calibrate and tweak performance
- Delivers fine-tuned performance

## Specifications

### Basics

|            |                |             |
|------------|----------------|-------------|
| Power      | 8000           | Watts       |
| Dimensions | 249 x 126 x 50 | Millimeters |

### Power Specifications

|                           | Rating                | Units    |
|---------------------------|-----------------------|----------|
| Suggested battery voltage | 36 to 72              | Volts DC |
| Power                     | Software configurable | Watts    |

### Output

|                 | Rating | Units    |
|-----------------|--------|----------|
| Phase current   |        |          |
| Absolute peak   | 600    | Amps DC  |
| 1 minute rating | 320    | Amps RMS |
| Continuous      | 130    | Amps DC  |

No airflow, no additional heat sinking, 25°C ambient

### Available Inputs

| Type     | Amount  |
|----------|---------|
| Hall     | up to 3 |
| Digital  | up to 2 |
| Analogue | up to 4 |

### Available Protocol Combinations

CAN with Bluetooth®

### Qualifications

- Meets EN 15194 European Safety Standards

### ASI BACDoor Bluetooth® Powered App:

