

The Controller  
is the Experience!

# BAC 350 Controller

Maximizes space while saving time & money.

Smooth Performance. **Silent.**  
**Configurable. Reliable.**

#### CUSTOMIZATION

Includes BACDoor software to calibrate and tweak performance


Delivers fine-tuned performance

#### QUALIFICATIONS


Meets **EN 15194** standards for controllers

**IP67** when used with a sealed connector

Includes BACDoor software to fine tune performance.

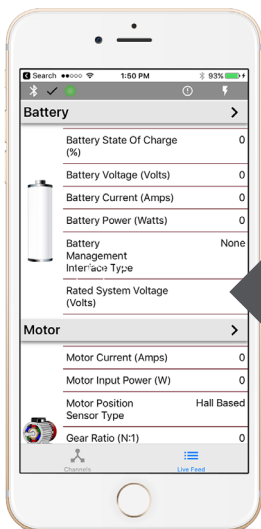

Power	350 Watts	
Weight	180 Grams	
Dimensions	81mm x 50mm x 26mm	
INPUT	RATINGS	UNITS
Suggested Battery Voltage	24 to 48	Volts DC
Power	Software configurable	Watts
OUTPUT *PHASE CURRENT	RATINGS	UNITS
Absolute Peak	50	Amps DC
1 minute rating	35	Amps RMS
Continuous	15	Amps DC
*No airflow, no additional heat sinking, 25°C ambient		
AVAILABLE PROTOCOL COMBINATIONS		
TTL-232 with	<b>RS-485</b>	
TTL-232 with	<b>Bluetooth</b>	
TTL-232 with	<b>LIN</b>	
LIN with	<b>Bluetooth</b>	

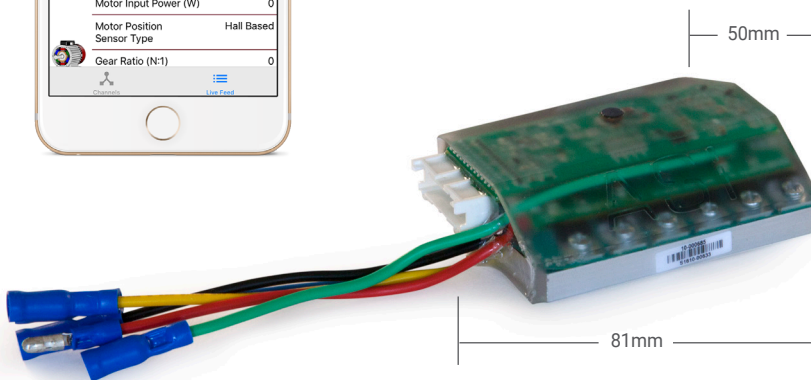

Engineered in Canada

**ASI** ACCELERATED SYSTEMS INC.

519.342.2507 | [www.accelerated-systems.com](http://www.accelerated-systems.com)

06.2017 © Accelerated Systems Inc.